


## Airless paint spray hose

## DATA SHEET

**TYPE : PC**

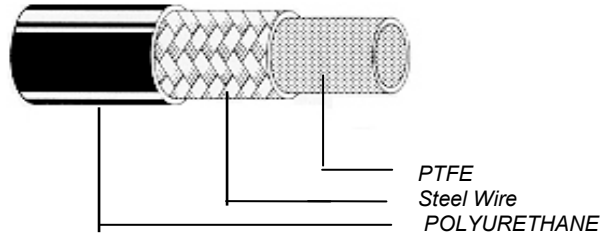

**Hose inner core of PTFE paint, solvent & aggressive fluids resistand**

### CONSTRUCTION

- **Inner tube** P.T.F.E
- **Reinforcement** High tensile single steel wire
- **Cover** Polyurethane

### APPLICATION

- HD Paint Spray
- HD Chemical Fluid Systes
- 

### TEMPERATURE RANGE

- - 40°C to 100° C
- - 40° F to 212° F

### PROPERTIES

- Excellent flexibility and flex-fatigue
- Excellent resistance to paint, solvent & aggressive fluids.
- Hose electrical conductive,
- High abrasion resistance
- Specially suitable for moisture cure adhesives and two components chemicals transfer
- UV and Ozone resistant
- Low volumetric expansion for quick response time
- 
- Light in weight
- Minimum flow resistance

### TECHNICAL SPECIFICATIONS: EXITFLEX TYPE PC-1xx

HOSE TYPE	1.3	1.4	1.6	1.8
HOSE ID INCH NOMINAL	3/16	1/4	3/8	1/2
HOSE ID MILLIMETRE	4,6	6,4	9,6	12,7
HOSE OD MILLIMETRE (+0.15 / -0.10)	9,5	11,7	15,2	18,4
<b>MAXIMUM OPERATING PRESSURE</b> (MAX. DYNAMIC PRESSURE) In Bar	350	325	250	200
In PSI	4'400	4'770	3'675	2'900
<b>MINIMUM BURST PRESSURE</b> in Bar	1400	1300	1000	800
In PSI	20'600	19'600	14'700	11'600
MINIMUM BEND RADIUS in mm	50	70	100	120
AVERAGE WEIGHT in GRMS per Meter				

### Note: UPON SPECIAL REQUEST

- COLOUR: Cover colour in blue or black.
- BULK HOSE: is available on non returnable reel

All recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Exitflex, its subsidiaries, affiliates and distributors, as to the effects of such use or the results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.